



1050


FRESA PARA REVESTIMIENTO EXTERIOR

Fresa calzada en HW para máquinas tupí y moldureras.

Combinando las 4 fresas, permite fabricar un revestimiento exterior de 18 mm a 30° o con radio 6.5.



Mod. A

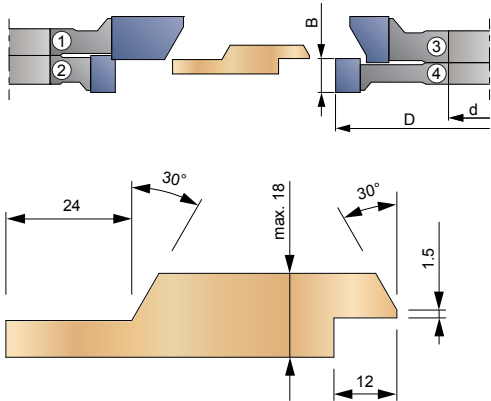


Modelo A

Fresa n°	D mm	B mm	d mm	Z n	RPM max	Código
1	170	21	30/50	4	9000	10504001
2	92	18	30/50	4	9000	10504002
3	146	22	30/50	4	9000	10504003
4	160	16	30/50	4	9000	10504004
1	170	21	30/50	6	9000	10504005
2	92	18	30/50	6	9000	10504006
3	146	22	30/50	6	9000	10504007
4	160	16	30/50	6	9000	10504008

Conjunto Revestimiento Exterior Mod. A 1-2-3-4	Z=4	10500009
Conjunto Revestimiento Exterior Mod. A 1-2-3-4	Z=6	10500010

Mod. B

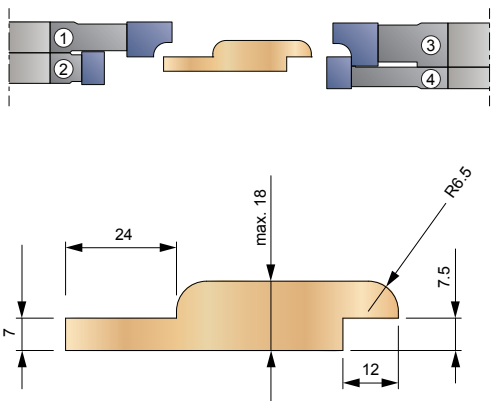

Modelo B

Fresa n°	D mm	B mm	d mm	Z n	RPM max	Código
1	170	21	30/50	4	9000	10504011
2	92	18	30/50	4	9000	10504012
3	146	22	30/50	4	9000	10504013
4	160	16	30/50	4	9000	10504014
1	170	21	30/50	6	9000	10504015
2	92	18	30/50	6	9000	10504016
3	146	22	30/50	6	9000	10504017
4	160	16	30/50	6	9000	10504018

Conjunto Revestimiento Exterior Mod. B 1-2-3-4	Z=4	10500019
Conjunto Revestimiento Exterior Mod. B 1-2-3-4	Z=6	10500020